



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R9W

SEC 26 | SEC 25
SEC 35 | SEC 36

U.S.B.&M.


E-21



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 04°02'07" E	66.19'
L2	N 39°12'03" E	29.64'
L3	S 23°38'06" W	42.59'
L4	S 07°37'00" E	33.34'
L5	S 22°49'14" E	31.53'
L6	N 81°39'52" E	62.28'

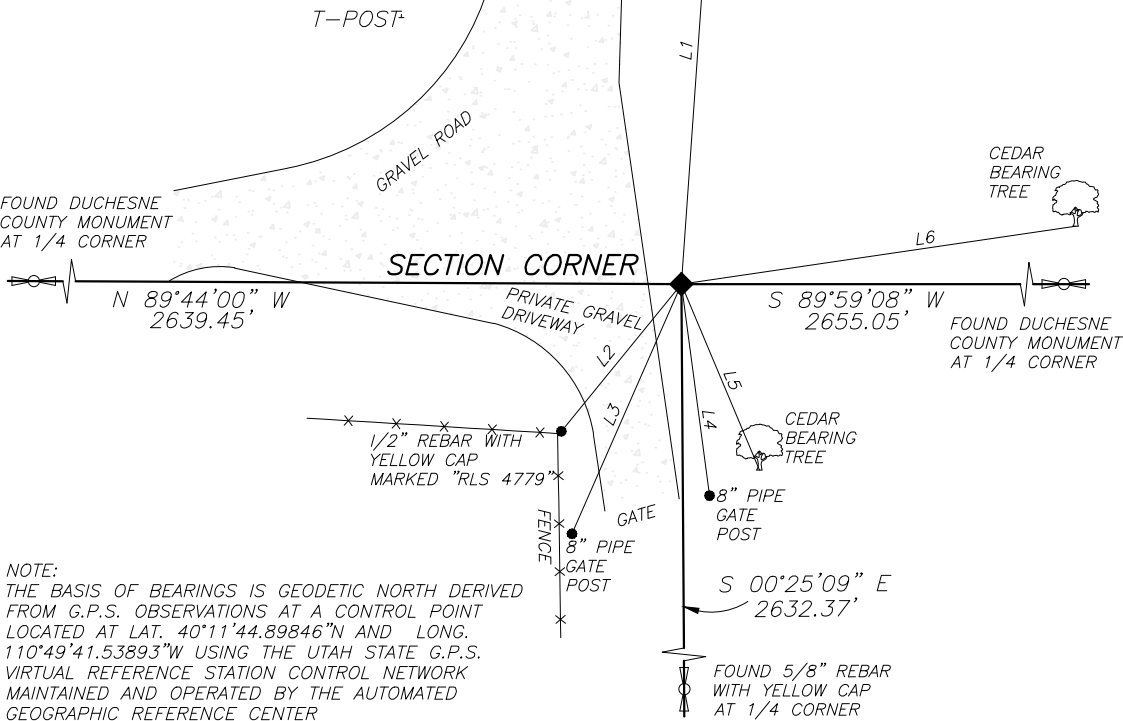

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND THE ORIGINAL MARKED STONE LAYING ON THE GROUND AT THE CORNER ALONG WITH TWO BEARING TREES. USED THE G.L.O. TIES FROM THE BEARING TREES TO DETERMINE THE POSITION OF THE CORNER.

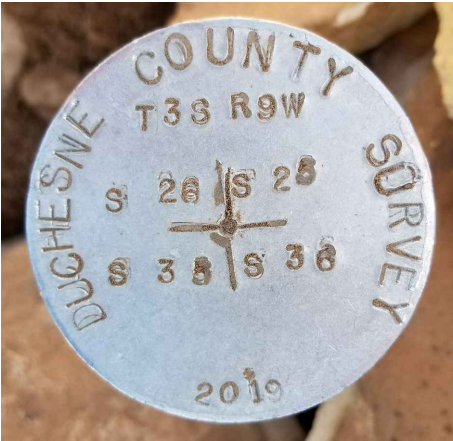


PHOTO OF MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A DUCHESNE COUNTY 2½" DIA. CAP AND PIPE MONUMENT WITH THE STONE UPSIDE DOWN ALONGSIDE AT POSITION OF SECTION CORNER IN MOUND OF STONES

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7236180.680
E: 1819563.473
NAVD88 EL: 6837.24'



PHOTO OF MONUMENT FACING NORTH

LATITUDE: 40°11'00.33654" N
LONGITUDE: 110°51'31.62522" W
ELLIPSOID HEIGHT: 6782.15'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300030S0090W0_600200

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 18 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

